




ICD-7331CK

3 Axis Indoor Dome Camera



Technical Specification

Camera Type	3 Axis Indoor Dome Camera
Image Sensor	1/3" C5A Super HAD CCD
Effective Pixel (NTSC)	768(H) x 494(V) Pixel
Effective Pixel (PAL)	752(H) x 582(V) Pixel
Scanning Systems	2:1 Interlace
Video Output	1.0Vp-p Composite Signal (75ohm)
S/N (Y Signal)	48 dB or more (AGC Off)
Frequency (NTSC)	Horizontal :15.734KHz / Vertical: 59.94Hz
Frequency (PAL)	Horizontal :15.625KHz / Vertical: 50.00Hz
Resolution	600 TV Lines
Lens	3.6mm Fixed Lens
IR LEDs	24 IR LEDs
IR Range	20 Meters
Minimum Illumination	0.01 Lux (0 Lux IR ON)
IR Smart	ON
OSD	N/A
OSD Language	N/A
Digital Day & Night	Digital DN
Automatic Gain Control	ON
Auto White Balance	External
Wide Dynamic Range	Digital WDR
Digital Noise Reduction	2D DNR
High Light Compensation	OFF
Back Light Compensation	OFF
Lens Shading Compensation	N/A
Privacy Masking	N/A
Sharpness	N/A
Mirror	N/A
Operation Temperature	-10°C -- +50°C
Ingress Protection	N/A
Certification	CE,FCC
Power Supply	DC12V 100mA (CDS On 300mA)
Dimension & Weight	112mm(D) x 87mm(H) & Appx. 200g

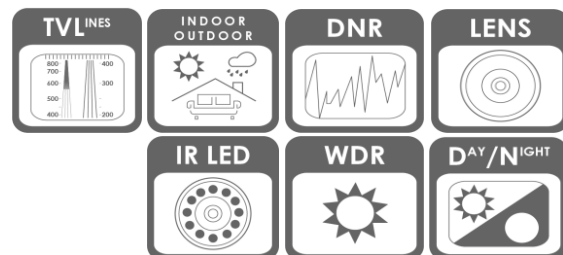

FEATURES:

- >600 TV Lines with 24 IR LEDs distance 20 Meters.
- >3.6mm fixed lens.
- >Min.Illumination 0.01 Lux.
- >Digital Day & Night Functions.
- >Digital Wide Dynamic Range Functions.
- >Made In Korea with 2 years warranty.

DIMENSIONS:

