




ICD-7552CX TRUE Day & Night Indoor Dome Camera



Technical Specification

Camera Type	3 Axis Indoor Dome Camera
Image Sensor	1/3" High Resolutions 960H CCD
Effective Pixel (NTSC)	768(H) x 494(V) Pixel
Effective Pixel (PAL)	752(H) x 582(V) Pixel
Scanning Systems	2:1 Interlace
Video Output	1.0Vp-p Composite Signal (75ohm)
S/N (Y Signal)	52 dB or more (AGC Off)
Frequency (NTSC)	Horizontal :15.734KHz / Vertical: 59.94Hz
Frequency (PAL)	Horizontal :15.625KHz / Vertical: 50.00Hz
Resolution	700 TV Lines
Lens	2.8mm - 12.0mm Varifocal Lens
IR LEDs	24 IR LEDs
IR Range	20 Meters
Minimum Illumination	0 Lux (IR ON)
IR Smart	ON
OSD	N/A
OSD Language	N/A
True Day & Night	True Day & Night
Automatic Gain Control	HIGH
Auto White Balance	External
Wide Dynamic Range	Digital WDR
Digital Noise Reduction	2D DNR
High Light Compensation	OFF
Back Light Compensation	OFF
Lens Shading Compensation	N/A
Privacy Masking	N/A
Sharpness	N/A
Mirror	N/A
Operation Temperature	-10°C -- +50°C
Ingress Protection	N/A
Certification	CE,FCC
Power Supply	DC12V 100mA (CDS On 350mA)
Dimension & Weight	112mm(D) x 78mm(H) & Appx. 200g

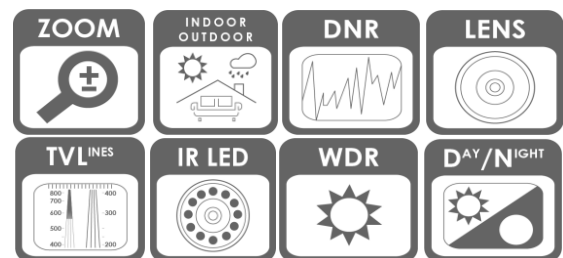

FEATURES:

- >700 TV Lines with 24 IR LEDs distance 20 Meters.
- >2.8mm - 12.0mm Varifocal lens.
- >Minimum Illumination 0 Lux.
- >True Color Day & Night Functions.
- >Digital Wide Dynamic Range Functions.
- >Made In Korea with 2 years warranty.



